



Malin Space Science Systems

Exploration Through Imaging

ECAM-IR3S


LWIR (8-14 μ m) Uncooled Microbolometer, 640x480, 17 μ m pitch, Shuttered for Non-Uniformity Correction

Electro-Optical	
Band	LWIR
Wavelength Range	8-14 μ m
Electronic Shutter Modes	Rolling
Pixels	0.3 Mpixel
Horizontal Resolution	640 pixels
Vertical Resolution	480 pixels
Pixel Pitch	17 μ m
Array Diagonal	13.6 mm
Conversion Bit Depth	16 bits
NEDT	<500mK with F/2 lens and 300K target temperature
Frame Rate, Native Format	12 fps


Power	
Supply Voltage	5V (4.5 to 5.35V)
Power, Idle	0.8 W
Power, Imaging	2 W

Thermal	
Operating Temperature	-30 to +40 °C
Protoflight Qualification	-40 to +55 °C
Non-Operating Temperature	-45 to +70 °C
Temperature Sensing	Internal ISL71590 available for readout on J1

Survivability	
Radiation Design Environment	5 years GEO standard, up to 15 years GEO optional
Predicted MTTF	4.6 million hours
NASA TRL	8

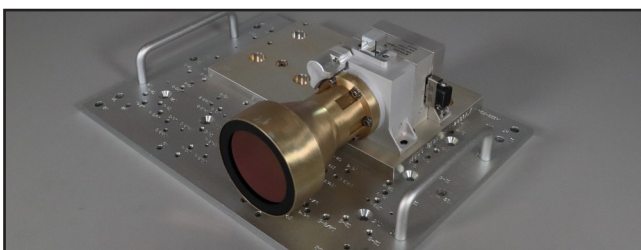

ECAM-IR3S with VNFOV optics

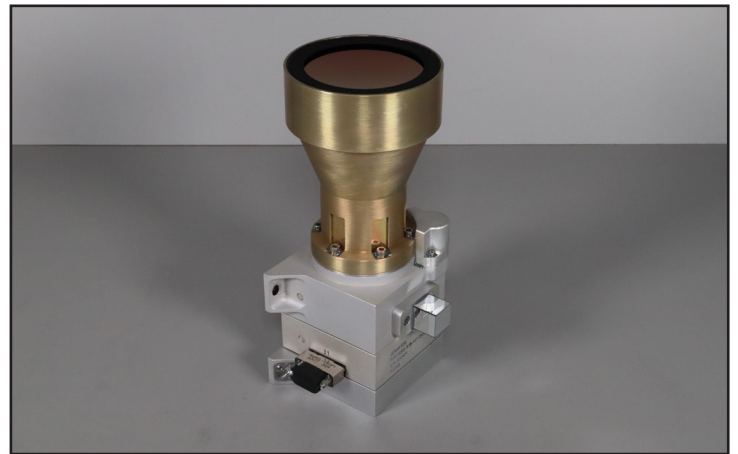

ECAM-IR3S with VNFOV optics

Features

- Compact thermal-IR camera
- Mechanical shutter for non-uniformity correction
- 1-point non-uniformity correction can be performed in the DVR
- Standardized ECAM interface

Programmability

- Shutter Control
- Sensor Clock Rate
- Gain
- Integration
- Region of Interest
- Test Pattern

Applications

- Space situational awareness (SSA)
- Rendezvous and proximity operations (RPO)
- Mission extension and inspection services
- Planetary science

Optics			
Effective Focal Length	F/#	FOV (V° x H°)	Bandpass
MFOV, 19.3 mm	F/1.5	25 x 32	8-12 μ m
NFOV, 39 mm	F/2.0	12 x 16	8-12 μ m
VNFOV, 102.8 mm	F/2.0	4.5 x 6	8-12 μ m

Digital	
Internal Memory	64 byte SpW Rx FIFO 512 byte SpW Tx FIFO No Frame Buffer
Digital Processing	None
Data Interface	SpaceWire (Single Port)





Malin Space Science Systems

Exploration Through Imaging

ECAM-IR3S

Dimensional Envelope

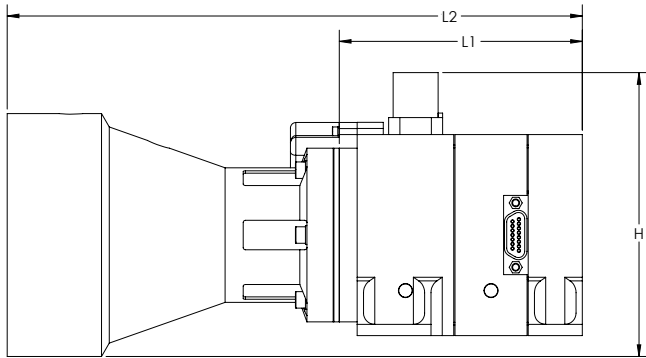

Mechanical/Interfaces

Mass w/VNFOV optics, no baffle	740 g
Dimensional Envelope w/VNFOV optics, no baffle	H: 81 mm W: 79 mm L1: 69 mm L2: 163 mm
Connectors	J1: Micro-D, 15-Socket ECAM Pinout
Mechanisms	Self-Restoring Shutter



Targets at approximately 1 km imaged from the Canyon View Cleanroom at MSSS with VNFOV optics. Image has been 1-point non-uniformity corrected using an image taken with the internal shutter actuated. Image Credit: MSSS

Quality: AS9100D:2016 Compliant
DUNS Number: 62-680-9032
CAGE Code: OR9V5
NAICS Codes: 333314, 333316, 334511, 336419, 541690, 541715

Version: 20220926
©2022 Malin Space Science Systems
All copyright and trademark rights reserved